



# RowCrop™ Spreader

AND OPEN FIELD



Wheel track adjusts from 90" to 152" width  
*High capacity spinner spreading for any row crop*

- |            |                |
|------------|----------------|
| Dry lime   | Poultry litter |
| Damp lime  | Sand           |
| Fertilizer | Gypsum         |
| Compost    | Much more      |





### Massive frame

Massive frame with oversized, adjustable axles handles any load.



Choose between models designed to hold 15 tons of lime or 15 tons of fertilizer.

# RowCrop™

## AND OPEN FIELD SPREADER

The Row Crop Spreader is designed for large growers who need wide swath spreading of lime or fertilizer. They ship "Variable Rate Ready", and come standard with an adjustable wheel track that can vary between 90" and 152", giving you the flexibility to top-dress standing crops planted on different row spacings. Choose between models that hold 15 tons of lime or 15 tons of fertilizer. The spreaders are outfitted with your choice of flotation or row crop tires. All RC spreaders come standard with Cor-Ten HSLA weathering steel hoppers.

### Adjustable wheel track

The axels on the Row Crop Spreader are adjustable from 90" to 152" wheel centers in 2" increments. Engineered for maneuverability in the field and easy change-over of wheel track width.



The suspension on the Row Crop Spreader is adjustable from 90" to 152" (in 2" increments).

### Standard features

- Adjustable wheel track (90"-152")
- Variable Rate Ready
- Plug to tractor hydraulic body chain
- Unibody, fully welded design
- Fertilizer kit for rates down to 125 lbs/acre
- Sawtooth Delivery™ feature
- Top driven dual hydraulic spinners
- Row Crop or Flotation tires
- Electronic gate actuator
- 12 gage Cor-Ten® HSLA steel hopper
- 7 gage Cor-Ten® HSLA steel pan
- 7 gage side braces
- 45 or 53 degree side slopes
- 24" slat style body chain
- Structural Steel Tube frame
- Extra body braces
- Sight window
- Ladder
- Telescoping chain tighteners
- Self-aligning idler shaft
- Inverted "V" center cover
- 4-1/2" bolt-in spindles
- 6:1 Heavy-duty gearbox on body chain
- Hydraulic valve (open/closed center tractor)
- Spinner speed adjustment valve
- CAT IV hitch



### Choice of Row Crop or Flotation Tires

Narrow for in-row work or wide for low compaction open field work.

“I bought my spreader 2 years ago for lime and fertilizer. It does a great job. I’m very pleased. It runs perfectly, no issues.”

— Michael, Campbell, NY

“The saying around here is that if you don’t get a Stoltzfus, you don’t get a good one”

— Tom, Marietta, OH

“Your spreader is one of the best pieces of equipment I ever bought”

— Paul, Potter, NY



**Electronic gate actuator**

Open and close the metering gate from the comfort of the tractor seat.



**Smoother material flow**

Our special Sawtooth Delivery™ feature prevents material surges for low rates of fertilizer, yet provides the toughness to handle damp ag lime with ease.



**Difference in the details**

Attention to details like placing the spinner motor above the material flow not only keeps it out of harmful chemicals but also isolates the motor from the shock of material pounding on the spinner disk.



**Convenient sight window**

The convenient sight window allows for viewing the bin level from the comfort of the cab.



**Ingenious engineering**

Our testing found that sides with a 53° slope provides the best material flow for lime and a 45° slope provides the best capacity for fertilizer. Our much-copied 4” vertical pan design eliminates bridging.

**RATING TABLE**

Wheel Track	Rating
90-138"	15 ton*
to 142"	14
to 148"	13
to 152"	12

\*14 ton w/ rowcrop tires



**1-800-843-8731**

# RowCrop™

AND OPEN FIELD  
SPREADER




Versatile • Dependable • Convenient • Solid Value • Rugged

All RC spreaders come standard with Cor-Ten® HSLA weathering steel hoppers. The unibody, fully welded construction is designed for years of trouble free use.

The Row Crop Spreaders ships "Variable Rate Ready" – ready to be connected to your precision ag controller for variable rate spreading.

## Options

- 304 Stainless steel hopper
- Shredder (breaks up large clumps before they hit the spinners)
- Roll top tarp
- Corner pockets (for sideboards)
- Lights

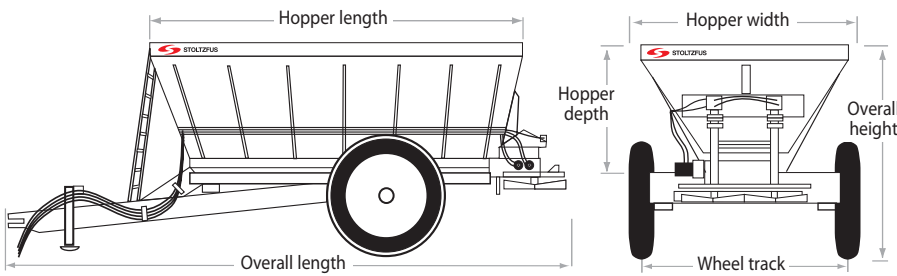

### Optional shredder

Heavy duty blades chop up any clumps and gives a smoother flow of material onto the spinners.

## STOLTZFUS ROW CROP SPREADER SPECIFICATIONS

Models	RC-1516	RC-1520
Max. load	15 tons	15 tons
Hopper volume	300 cu.ft.	510 cu.ft.
Hopper side slopes	53 deg.	45 deg.
Hopper length	16 ft.	20 ft.
Hopper width	88 in.	102 in.
Hopper depth	51 in.	55 in.
Overall length	27 ft.	29.5 ft.
Overall width	105-180 in.	105-180 in.
Overall height	114 in.	118 in.
Wheel track (center)	90-152 in.	90-152 in.
Flotation tires (28" wide)	710/70R38	710/70R38
Row crop tires (15" wide)	380/90R46	380/90R46
Weight	9,100 lbs.	12,200 lbs.



**STOLTZFUS**  
Spreaders

**1-800-843-8731**

StoltzfusSpreaders.com

Morgantown, PA 19543

Dealer information: